


UHF RFID tag, ALN-9850-WRW Aviator Higgs-EC, 44mm x 83mm, dry inlay

RFID sticker for UHF frequency (856 MHz - 950 MHz). The stated unit price for the test quantity is the same for all types and dimensions. Unit prices for quantities over 20,000 pcs are several times lower and are different for each type.

YOUTUBE='ybURFGqVORo'

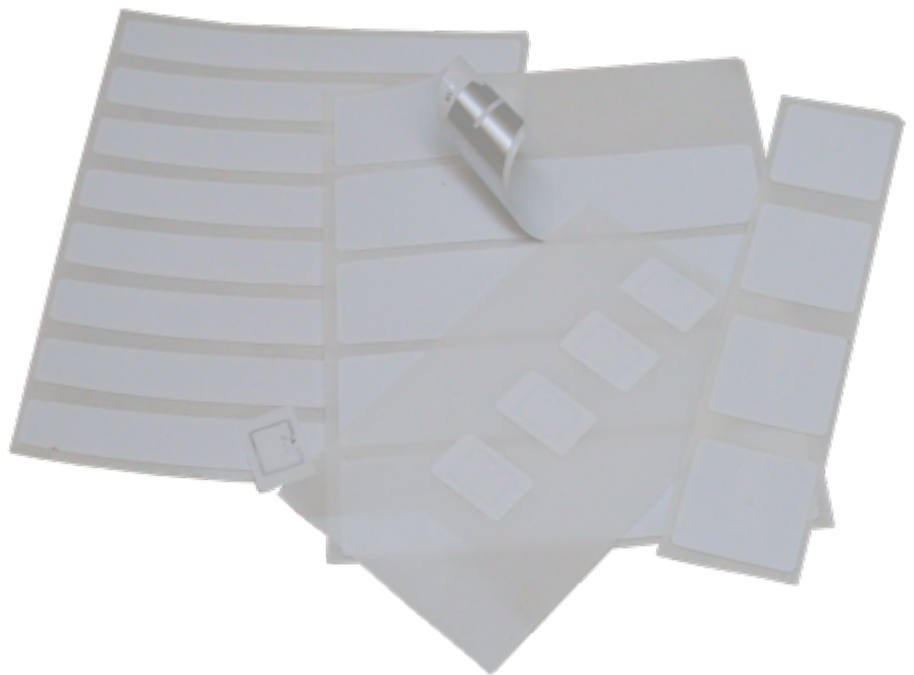

Technical Description

Functionality & Operation

Frequency	UHF: 865 - 956 MHz
RFID transponder protocols	ISO 18000-6C, EPC Class 1 Gen2
Write cycles	100000
Memory	128bit User memory

Consumables

Media type	Roll-feed, printable polyolefin
------------	---------------------------------

Environment

Operating temperature	-40 to 70°C
Operating humidity (non-condensing)	20 to 90%

CODEWARE, s.r.o.

Jaromírova 484/37
120 00 Praha 2 - Nusle
IČ: 61061395, DIČ: CZ61061395

+420 222 562 444
codeware@codeware.cz
<https://www.codeware.cz/>

