




UHF RFID tag, ALN-9862-WRW Short Higgs-EC, 73.5mm x 20.2mm, adhesive label

RFID sticker for UHF frequency (856 MHz - 950 MHz). The stated unit price for the test quantity is the same for all types and dimensions. Unit prices for quantities over 20,000 pcs are several times lower and are different for each type.

The different types of RFID tags are available to see, test and discuss at our business address. If the product isn't available in our stock, it can be ordered from a minimum of 100 pieces.

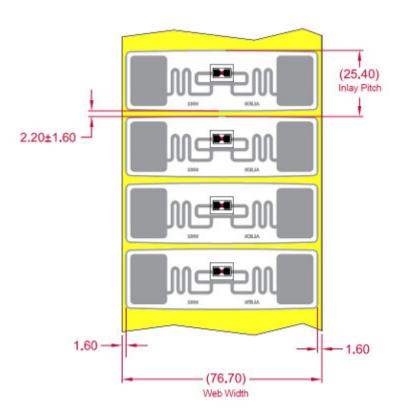



Technical Description

Functionality & Operation

Frequency	UHF: 865 - 956 MHz
RFID transponder protocols	ISO 18000-6C, EPC Class 1 Gen2
Write cycles	100000
Memory	128bit User memory
Consumables	
Media type	Roll-feed, printable polyolefin
Environment	
Operating temperature	-40 to 70°C
Operating humidity (non-condensing)	20 to 90%

CODEWARE, s.r.o. Jaromírova 484/37

120 00 Praha 2 - Nusle IČ: 61061395, DIČ: CZ61061395





