



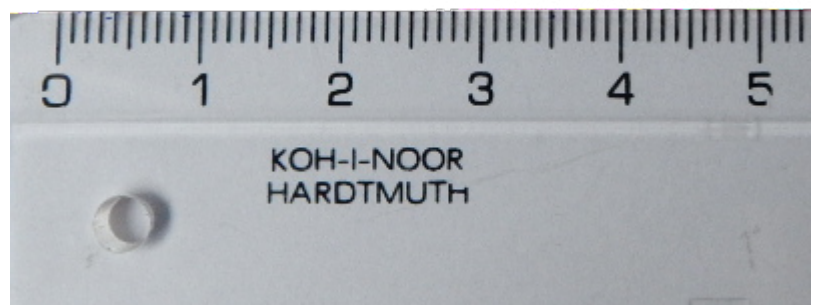

UHF RFID Tag, 50x25 mm, 220°C resistant

RFID tag for European UHF frequency designed for a specific purpose. In our offer you will find RFID tags suitable for carrying on the body, for attaching directly to a metal surface, resistant to high temperatures or weather conditions, etc.

The different types of RFID tags are available to see, test and discuss at our business address. If the product isn't available in our stock, it can be ordered from a minimum of 10 pieces.

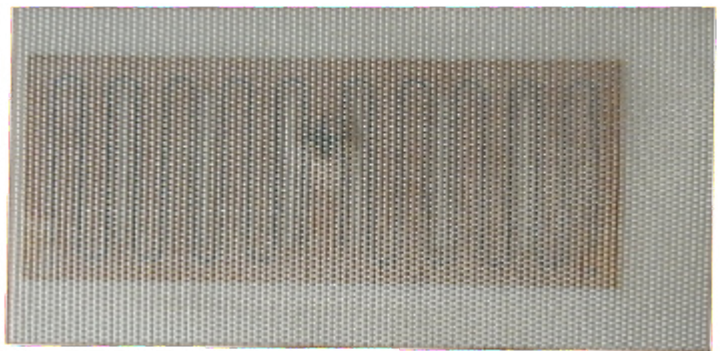

Technical Description

Functionality & Operation

Frequency	UHF: 860 - 960 MHz
-----------	--------------------

Reading/writing distance	3m
--------------------------	----

RFID transponder protocols	EPC Class 1 Gen2
----------------------------	------------------

Environment

Operating temperature	-25 to 250°C
-----------------------	--------------

Ingress protection	IP67
--------------------	------

CODEWARE, s.r.o.

Jaromírova 484/37
120 00 Praha 2 - Nusle
IČ: 61061395, DIČ: CZ61061395

+420 222 562 444
codeware@codeware.cz
<https://www.codeware.cz/>

